

L-Handle for Padlock Pr20.1 L18 Stainless Steel

7-100



Advantages

- IP65 according to DIN EN 60529.
- RH / LH application.
- Grounding by grounding nut.
- On request parts can be assembled by DIRAK.
- A pre-assembled quarter-turn can be installed in the cutout.

Material

- **L-Handle:** AISI 316, surface polished
- **Grounding nut:** stainless steel
- **O-ring:** NBR

Remarks


(S) Door-thickness max. 8mm

Please configure the quarter-turn with a cam.

For functional reasons, the cam must be assembled at 90° to the L-handle.

Quarter-Turn with L-handle for padlock

	Product number	Housing length	Installation type	Delivery Unit
a)	200-9481.00-00000	18 mm	screw-on	1 pc.

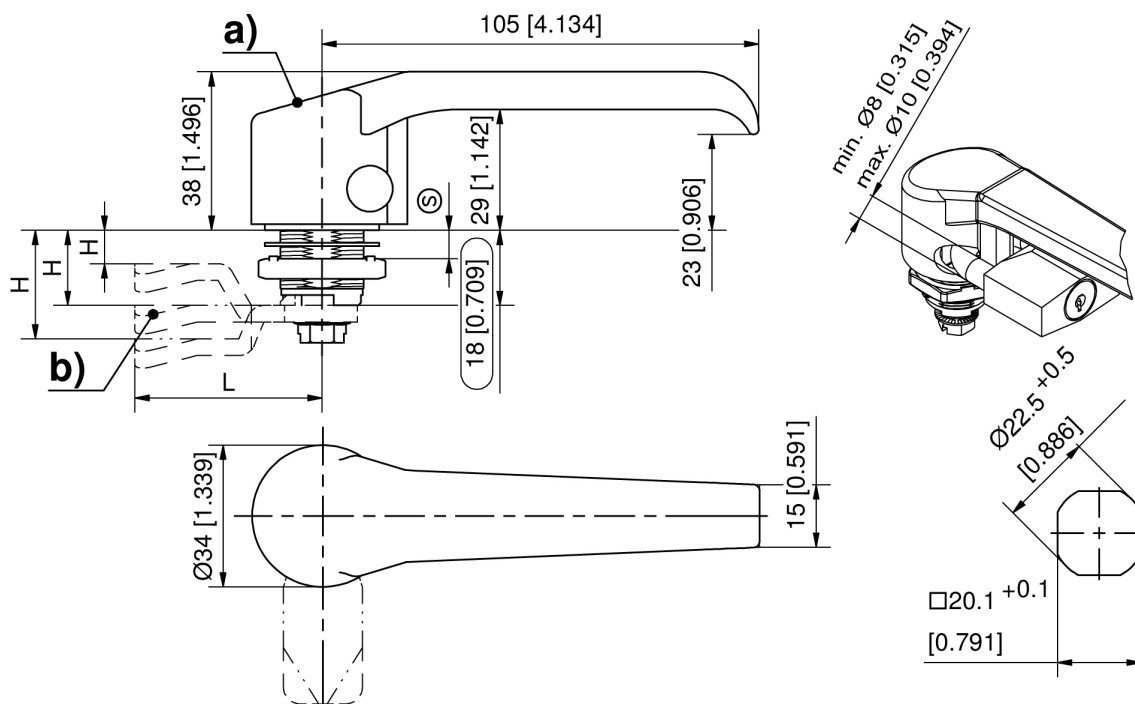

Einbauanleitung für 7-100 / installation instructions for 7-100

Einbaustellung des Gehäuses, gesehen von der Türseite, bei: / fitting position of housing, seen from outside of the door, at:

