

DST Swinghandle RS PrC

2-077DST



Advantages

- Low profile design.
- Tool-less installation.
- The pre-assembled swinghandle (single or 3-point cam) can simply be snapped into the cutout. (3./4.)
- 90° Closing rotation. (1.)
- Key Cylinder DIRAK 1333 with stainless steel dust cap and 1 key with synthetic coated grip.
- Seismic-proof according to GR-63-CORE, Issue 4.
- Vibration-proof according to DIN EN 61373.
- IP65 according to DIN EN 60529 by captive sealing. (2.)
- RH / LH Application is achieved by an adjustable cam stop. (5.)

Material

- **Swinghandle and dish:** zinc die, black
- **Seal:** TPE
- **Stop:** zinc die, zinc plated

Remarks

H-dimension of cam ≥ 16 mm


Drawings for rod calculation:


1. stroke 18mm
2. clearance



Swinghandle

| Product number | Clamping range (S) | Latching type | Installation type | Delivery Unit |
|-------------------|--------------------|------------------------|-------------------|---------------|
| 407-9601.00-00015 | 1.2 mm - 1.7 mm | keyed alike DIRAK 1333 | clip-in | 1 pc. |
| 407-9601.00-00020 | 1.7 mm - 2.2 mm | keyed alike DIRAK 1333 | clip-in | 1 pc. |
| 407-9601.00-00025 | 2.2 mm - 2.7 mm | keyed alike DIRAK 1333 | clip-in | 1 pc. |

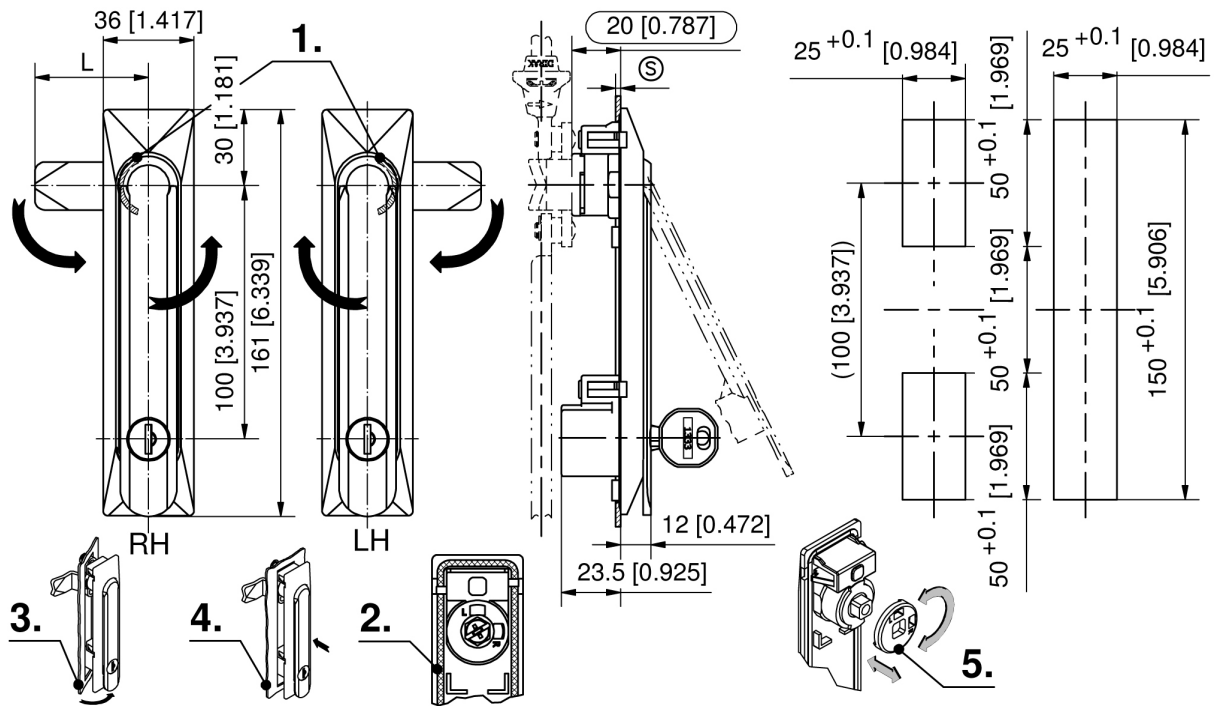

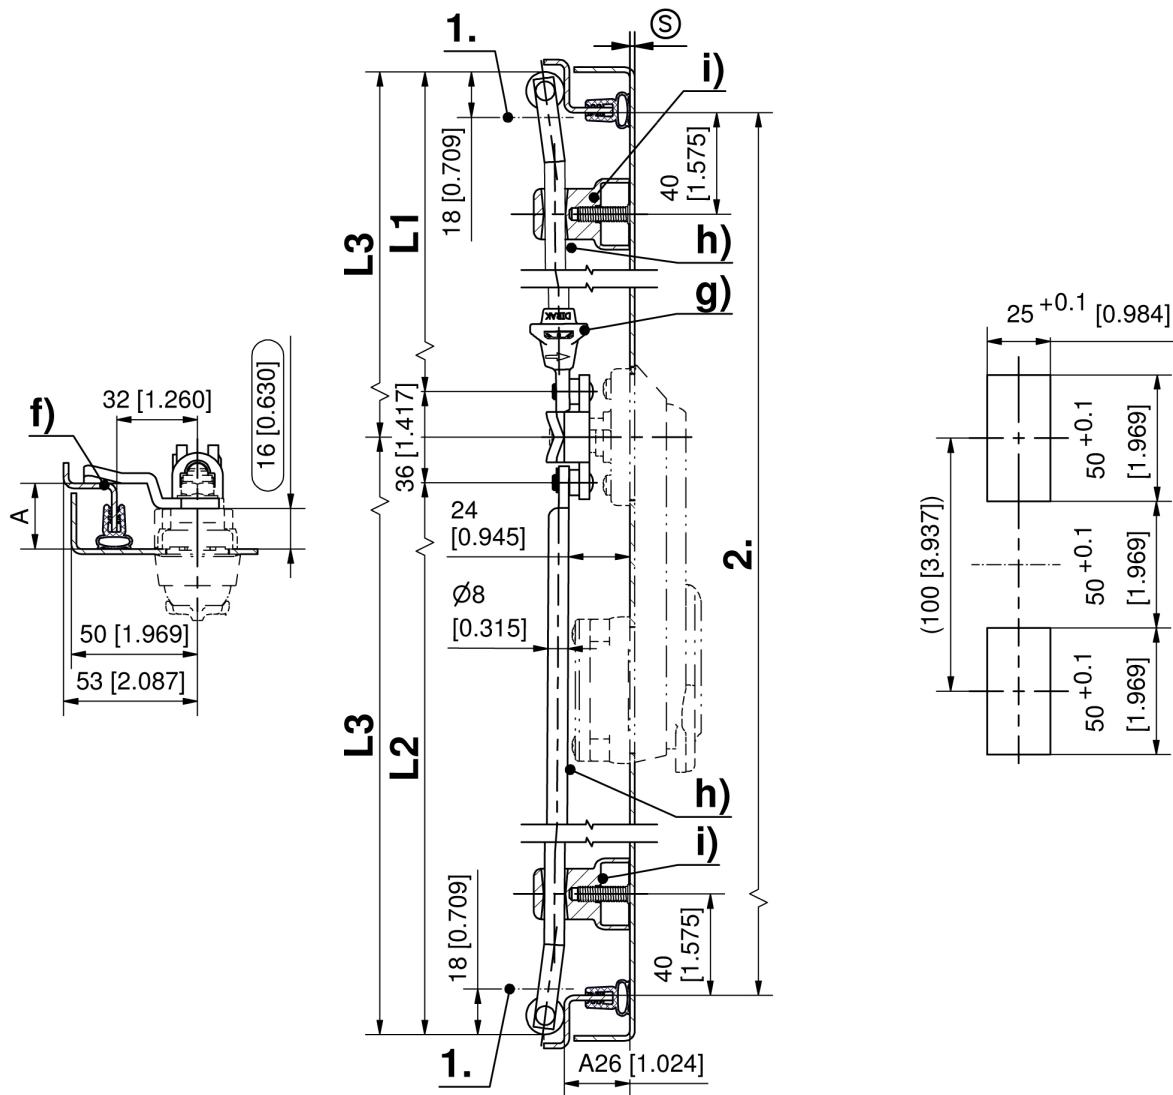

Formula for rods with eye and rollers:
cutout in the door center (rod length varies)

$$L1 = \frac{\text{upper rod}}{2} = \frac{2 \cdot \text{clearance} - 12\text{mm}[0.472]}{2 [0.079]} - 50 \text{ mm} [1.969] \quad L2 = \frac{\text{lower rod}}{2} = \frac{2 \cdot \text{clearance} - 12\text{mm}[0.472]}{2 [0.079]} + 50 \text{ mm} [1.969]$$

cutout outside the door center (rod length equal)

$$L3 = \frac{2 \cdot \text{clearance} - 12\text{mm}[0.472]}{2 [0.079]}$$