


Concealed Hinge Pr03 120° Stainless Steel

7-150

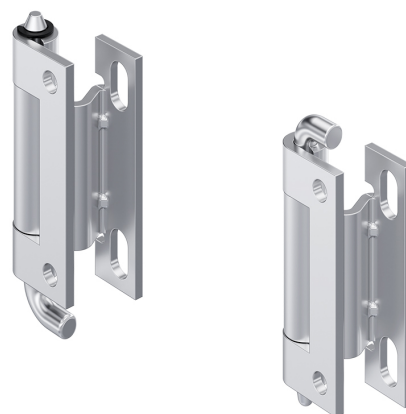

Advantages

- For surface mounted doors.
- Hinge concealed.
- Door bending 18mm.
- RH / LH application.
- 120° Opening angle.
- Frame-part: screw-on.
- Door-part: weld-on or screw-on.
- The hinge can also be supplied with a self-locking POM pin which can be mounted upside-down for very short enclosures.

Material

- **Frame-part, pin:** AISI 304
- **Door-part:** AISI 303 or AISI 304
- **Pin:** AISI 303, AISI 304 or POM natural

Remarks

Concealed hinge

	Product number	Material door-part	Pin version	Material pin	Installation type door-part	Delivery Unit
a)	216-9103.00-00000	AISI 316	without groove	AISI 303	screw-on	10 pcs.
b)	216-9111.00-00000	AISI 304	with groove incl. locking washer DIN6799	AISI 304	screw-on	10 pcs.
c)	216-9111.00-00001	AISI 304	with groove incl. o-ring	AISI 303	screw-on	10 pcs.
d)	216-9105.00-00000	AISI 304	without groove	POM	screw-on	10 pcs.
e)	216-9120.00-00000	AISI 303	without groove	AISI 303	weld-on	10 pcs.
f)	216-9125.00-00000	AISI 303	with groove incl. locking washer DIN6799	AISI 303	weld-on	10 pcs.
g)	216-9125.00-00001	AISI 303	with groove incl. o-ring	AISI 303	weld-on	10 pcs.
h)	216-9123.00-00000	AISI 303	without groove	POM	weld-on	10 pcs.

