


# Concealed Hinge Pr03 120° Stainless Steel

7-160

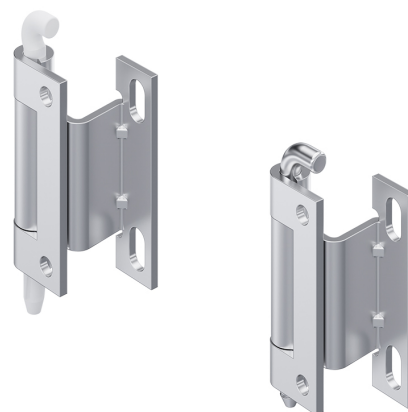

## Advantages

- For surface mounted doors.
- Hinge concealed.
- Door bending 24 mm.
- RH / LH application.
- 120° Opening angle.
- Frame-part: screw-on.
- Door-part: weld-on or screw-on.
- The hinge can also be supplied with a self-locking POM pin which can be mounted upside-down for very short enclosures.

## Material

- **Frame-part and door-part:** AISI 304
- **Pin:** stainless steel or POM natural

## Remarks

## Concealed hinge

| Product number       | Material pin    | Pin version                              | Installation type door-part | Delivery Unit |
|----------------------|-----------------|------------------------------------------|-----------------------------|---------------|
| a) 216-9104.00-00000 | stainless steel | without groove                           | screw-on                    | 10 pcs.       |
| b) 216-9112.00-00002 | stainless steel | with groove incl. locking washer DIN6799 | screw-on                    | 10 pcs.       |
| c) 216-9112.00-00001 | stainless steel | with groove incl. o-ring                 | screw-on                    | 10 pcs.       |
| d) 216-9106.00-00000 | POM             | self-locking                             | screw-on                    | 10 pcs.       |
| e) 216-9122.00-00000 | stainless steel | without groove                           | weld-on                     | 10 pcs.       |
| f) 216-9126.00-00000 | stainless steel | with groove incl. locking washer DIN6799 | weld-on                     | 10 pcs.       |
| g) 216-9126.00-00001 | stainless steel | with groove incl. o-ring                 | weld-on                     | 10 pcs.       |
| h) 216-9124.00-00000 | POM             | self-locking                             | weld-on                     | 10 pcs.       |

