


DST Fastener □9.5 without Leaf Spring

1-041.04DST



Advantages

- With DIRAK-SNAP-Technology for joining sheet metal panels.
- For cutout □9.5.
- Vibration-proof.
- Tool-less installation.
- This fastener can be disengaged from the front of the panel using a Phillips H2 screwdriver.
- Sheet metal panels are easily joined by manually pressing the fastener through the panel cutout.
- One piece.

Material

- **Housing:** zinc die, untreated
- **SNAP wedges:** sintered steel, zinc plated
- **Insert:** aluminum, hardened

Remarks




Removal: by turning the screwdriver counterclockwise, the SNAP wedges (1.) are retracted. The leaf spring pushes the fastener out of rear panel, however, the U-shaped spring holds the fastener captive in the front panel. (3.) Cutout in the rear panel can also be an oblong hole for tolerance adjustment. (2.) Cutout front panel. The (S) Dimension indicates the total thickness of the sheet metal panels.

Delivery time on request!


Fastener with insert Phillips H2, without leaf spring

	Product number	Clamping range (S)	Dimension X	Installation type	Delivery Unit
a)	294-9114.00-00031	3 mm - 3.3 mm	11 mm	tool-less	10 pcs.
a)	294-9114.00-00039	3.8 mm - 4.1 mm	11 mm	tool-less	10 pcs.
b)	294-9120.00-00042	4 mm - 4.5 mm	13 mm	tool-less	10 pcs.
b)	294-9120.00-00051	5 mm - 5.3 mm	13 mm	tool-less	10 pcs.
b)	294-9120.00-00055	5.4 mm - 5.7 mm	13 mm	tool-less	10 pcs.
b)	294-9120.00-00059	5.8 mm - 6.1 mm	13 mm	tool-less	10 pcs.
b)	294-9120.00-00067	6.6 mm - 6.9 mm	13 mm	tool-less	10 pcs.

a), b)

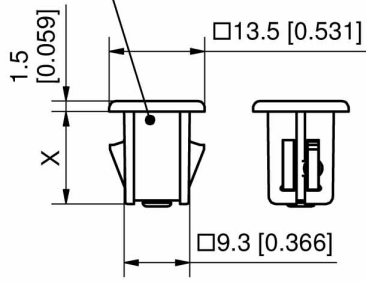

2.



3.

