

Quarter-Turn mechatronic with wing knob Pr.20.1 / DD L30

MLI1102



Advantages

- Electronic unlocking by applying voltage.
- Closure position can be evaluated.
- IP65 according to DIN EN 60529.
- Mechanical emergency opening by key cylinder.
- RH / LH application.

Material

- **Housing:** zinc die, black
- **Cylinder:** zinc die with stainless steel dust-shutter
- **Wing knob:** PA, black with zinc die core

Remarks

(S) Door-thickness 1-3mm

Further technical details please see data sheet

Quarter-Turn MLI1102 with wing knob

Product number	Voltage	Cutout	Installation type	Delivery Unit
610-9103.12-01333	12V	20.1	screw-on	1 pc.
610-9103.24-01333	24V	20.1	screw-on	1 pc.
610-9104.12-01333	12V	Ø19.3 x 16.4	screw-on	1 pc.
610-9104.24-01333	24V	Ø19.3 x 16.4	screw-on	1 pc.

Functionality/Activation

Mechanical opening option via cylinder barrel or electronic opening/release by applying voltage. Latch position can be evaluated.

Open/Close status


Latch position can be evaluated via potential-free integrated reed sensor

- Contact form: Normally open contact (when the handle is closed, the contact is closed)
- Switching voltage: max. 30V DC
- Transport current, switching current: max. 0.5A
- Sensor resistance: 280 mohm
- Working temperature: Cable will not be moved -30°C to 80°C; cable will be moved -5°C to 80°C


Technical data

- Power supply (DC): 12V/24V
- Current: 290mA/125mA
- Temperature range: 0°C to 70°C
- Features: IP65 according to DIN EN 60529; mechanical emergency opening possible via cylinder barrel with various closing options
- Solenoid: Duty cycle = 100%
- Housing length HL = 30mm
- Wall/sheet thickness: up to 1 – 3mm
- Opening cycles: > 250,000
- ROHS, REACH
- Installation position inside housing: Horizontal left and right side, vertical only downwards

Permissible housing orientation for operation

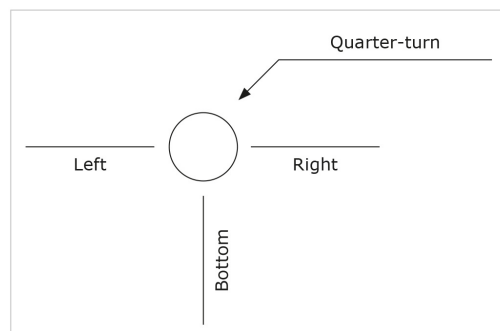

Wire designation

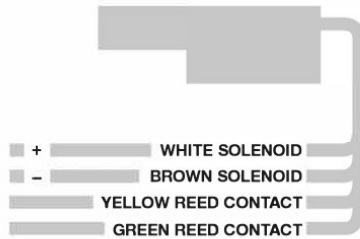

Connection line

- Length: 4m
- Ø 4.4mm with 4 single wires cross-section 0.25mm²

Liability clause for sales products

The above information and our technical application advice, whether verbal, in writing or by means of tests, are given to the best of our knowledge. However, this information shall be regarded as non-binding only, also with regard to any third-party property rights.

This information does not exempt you from conducting your own review of our current advisory suggestions. This applies in particular to the technical information on our products in terms of their suitability for use and application.

The application, use and processing of our products and the products manufactured by you on the basis of our technical application advice are beyond our control and are therefore exclusively your responsibility.

The sale of our products is subject to our current general terms and conditions of sale and delivery.

