


# Rod Latch for Multi-Point Locking FS PrC

3-170

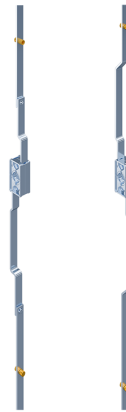

## Advantages

- Rod latch for mounting outside the sealed area.
- For Cutout C.
- Flat rods 14x3mm with mounted dual rollers.
- Dual hooks provide compression.
- By rotating around the longitudinal axis RH / LH application.
- Suitable for inserts and escutcheons, wing knob, L-handle or swinghandle.
- Grounding with grounding clip (optional).

## Material

- **Rod latch:** zinc die
- **Rods:** steel, zinc plated
- **Dual rollers:** brass

## Remarks

Version a) one-piece - 2 latching points.

Version b) three-part (lock with quick fastening and two rods) - 4 latching points.

1. stroke 24mm
2. open position
3. closed position

**Attention:** if the rod guide 208-1523.54 is used the weld stud has to be moved 2mm inwards!

## Rod latch + flat rods and dual rollers

Product number	Name	Door height Th	Locking points	Dual rollers A	Dual rollers B	Total dimension extended	Installation type	Delivery Unit
a) 208-9101.00-00000	Rod latch, 1-part	800 mm - 1200 mm	2	300	-	750	screw-on	1 pc.

---

Product number	Name	Door height Th	Locking points	Dual rollers A	Dual rollers B	Total dimension extended	Installation type	Delivery Unit
a) 208-9102.00-00000	Rod latch, 1-part	1200 mm - 1600 mm	2	450	-	1050	screw-on	1 pc.
b) 208-9107.00-00000	Rod latch, 3-parts	1600 mm - 1900 mm	4	275	700	1550	screw-on	1 pc.
b) 208-9108.00-00000	Rod latch, 3-parts	1900 mm - 2200 mm	4	275	850	1850	screw-on	1 pc.

---

