


DST Flat Rods FS variable

3-171DST

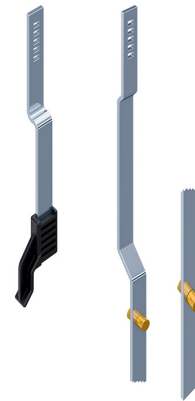

Advantages

- For product system 3-150DST.
- The rod end with five holes has to be mounted on the swinghandles of product system 3-150DST.
- Flat rod a) with brass rollers for use outside of the sealed area.
- The rollers snap into the dual hooks of product system 3-912, 3-910DST.
- Flat rod b) for use inside of the sealed area.

Material

- **Flat rods:** steel, zinc plated
- **Rollers:** brass

Remarks

1. middle of the lock
2. view outside of the sealed area
3. view inside of the sealed area

For part numbers please contact DIRAK.

Please provide the following data:

For outside of the sealed area: dimensions L, Y and Z

For inside of the sealed area: dimension L (X see 3-162)

For ramp-shoe product system 3-162.

Rod guides see product systems 3-910 and 3-911.

Flat rods 14 x 3mm

	Product number	Version	Installation type	Delivery Unit
a)	208-9837.00-Lxxmm	with rollers	tool-less	on request
b)	208-1063.15-Lxxmm	for ramp-shoe	tool-less	on request

